




GENERAL COMPONENTS INDUSTRY CORP.

旭誠工業股份有限公司

GDI SERIES

★ CONFIGURATION & DIMENSIONS :

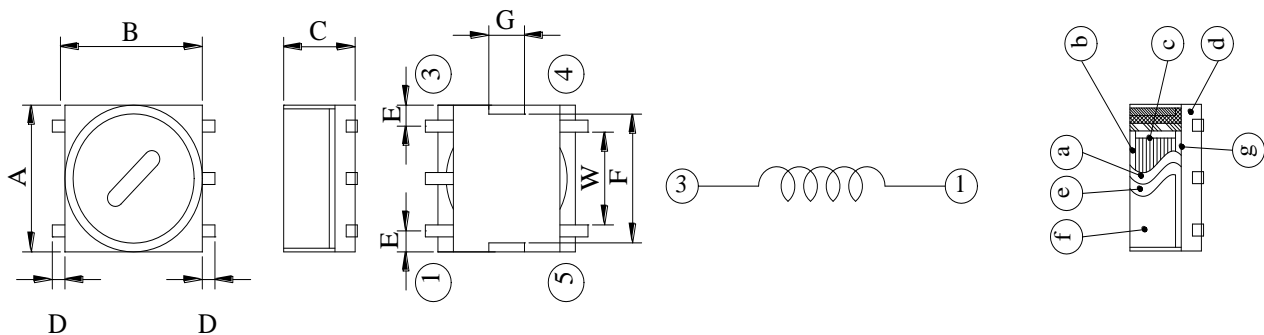

SERIES	A	B	C	D	E	F	G	W
GDI0402	4.90 ± 0.2	4.90 ± 0.2	2.55 MAX.	0.45 REF.	1.50 ± 0.2	3.40 ± 0.30	1.20 ± 0.15	0.40 ± 0.2

UNIT : m/m

★ MATERIALS :

- a · CORE : FERRITE THP CORE
- b · CORE : FERRITE DR CORE
- c · WIRE : ENAMELLED COPPER WIRE 130°C
- d · BASE: PHENOLIC PM9630
- e · CASE: LCPE4008
- f · CLIP: TINNED COPPER PLATE
- g · ADHESIVE : EPOXY RESIN

★ GENERAL SPECIFICATION :

- a · INDUCTANCE: 330 MAX. uH
- b · OPERATIONAL FREQUENCY: 13 MAX. MHZ.
- c · INDUCTANCE VARIABLE RANGE: $\pm 2.5\%$