


General Components Industry Corporation

INDUCTOR

DR8 SERIES

1. DIMENSION (mm)

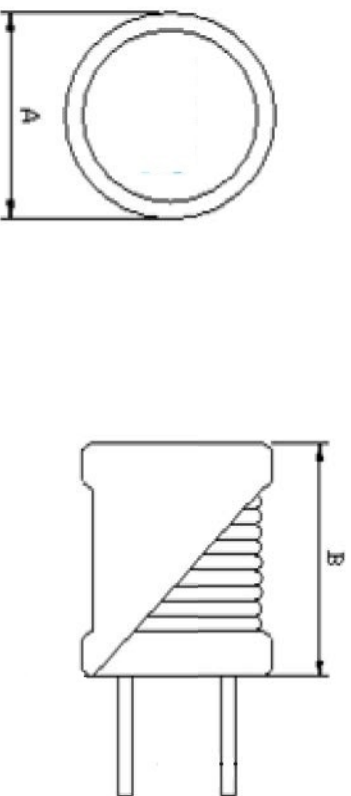

3. ELECTRIC CHARACTERIST

L (uH) $\pm$ 20%	Marking	Rdc (m Ω) Max	30% drop Idc(A) Max	A (mm) max	B (mm) max	Pitch (mm)
10	100	30	6.60	10.5	12.0	5.0 $\pm$ 0.5
22	220	50	4.40	10.5	12.0	5.0 $\pm$ 0.5
33	330	80	3.70	10.5	12.0	5.0 $\pm$ 0.5
47	470	100	3.00	10.5	12.0	5.0 $\pm$ 0.5
56	560	150	2.50	10.5	12.0	5.0 $\pm$ 0.5
68	680	170	2.50	10.5	12.0	5.0 $\pm$ 0.5
82	820	200	2.20	10.5	12.0	5.0 $\pm$ 0.5
100	101	220	2.00	10.5	12.0	5.0 $\pm$ 0.5
220	221	440	1.30	10.5	12.0	5.0 $\pm$ 0.5
330	331	700	1.10	10.5	12.0	5.0 $\pm$ 0.5
470	471	1000	0.99	10.5	12.0	5.0 $\pm$ 0.5
560	561	1100	0.93	10.5	12.0	5.0 $\pm$ 0.5
1000	102	2200	0.69	10.5	12.0	5.0 $\pm$ 0.5

2. SCHEMATICS

