




General Components Industry Corporation

INDUCTOR

DR6 SERIES

1. DIMENSION (mm)

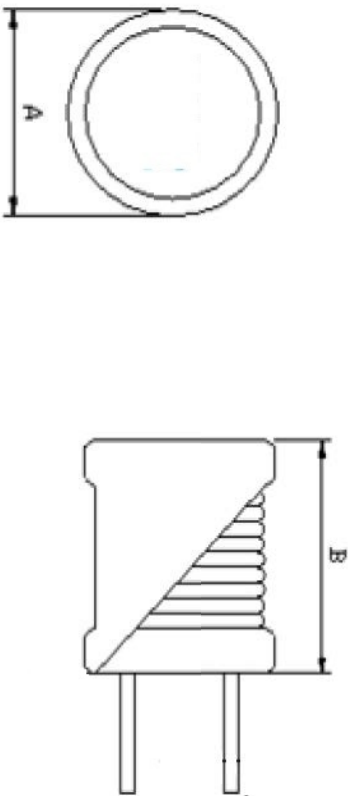

3. ELECTRIC CHARACTERIST

L (uH)±20%	Marking	Rdc (mΩ) Max	30% drop Idc(A) Max	A (mm) max	B (mm) max	Pitch (mm)
10	100	35	4.00	7.5	10.0	3.5±0.5
22	220	78	2.70	7.5	10.0	3.5±0.5
33	330	120	2.20	7.5	10.0	3.5±0.5
47	470	160	1.80	7.5	10.0	3.5±0.5
56	560	190	1.70	7.5	10.0	3.5±0.5
68	680	250	1.50	7.5	10.0	3.5±0.5
82	820	280	1.40	7.5	10.0	3.5±0.5
100	101	380	1.30	7.5	10.0	3.5±0.5
220	221	730	0.89	7.5	10.0	3.5±0.5
330	331	1110	0.72	7.5	10.0	3.5±0.5
470	471	1600	0.61	7.5	10.0	3.5±0.5
560	561	1850	0.56	7.5	10.0	3.5±0.5
1000	102	3000	0.43	7.5	10.0	3.5±0.5

2. SCHEMATICS

