



Molding Power Inductor

GMPC1707HP-Series(G)-D

1. Features


1. Carbonyl Powder.
2. Compact design.
3. High current, low DCR, high efficiency.
4. Very low acoustic noise and very low leakage flux noise.
5. High reliability.
6. 100% Lead(Pb)-Free and RoHS compliant.
7. Operating temperature -40~+125℃(Including self - temperature rise)



2. Applications


Note PC power system, incl. IMVP-6
DC/DC converter .

3. Dimensions

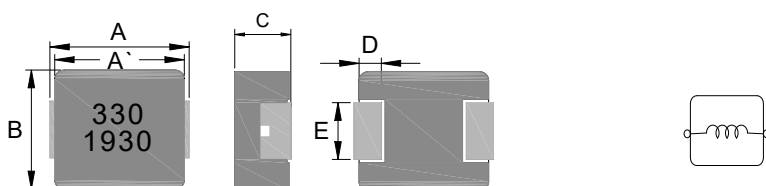

Series	A(mm)	A'(mm)	B(mm)	C(mm)	D(mm)	E(mm)
GMPC1707HP	17.6±0.4	16.9±0.3	16.9±0.3	6.7±0.3	2.1±0.3	11.9±0.3

Recommend PC Board Pattern



L(mm)	G(mm)	H(mm)
18.5	12.2	12.5

Note: 1. The above PCB layout reference only.
2. Recommend solder paste thickness at 0.17mm and above.

4. Part Numbering

GMPC	1707	HP	-	330	MG	-	D
A	B	C		D	E		F

A: Series

B: Dimension

C: Type

D: Inductance

E: Inductance Tolerance

F: Code

BxC

HP:H:Carbonyl Powder,P:PAD broaden.

330=33.0uH

M=±20%

Marking: Black.330 and 1930(19 YY,30 WW, follow production date).



5. Specification

Part Number	Inductance L0 (uH)±20%	I rms (A) Typ	I sat 1 (A) Typ	I sat2 (A) Typ	DCR (mΩ) Typ. @25℃	DCR (mΩ) Max. @25℃
GMPC1707HP-R45MG-D	0.45	62.0	85.0	125.0	0.8	0.96
GMPC1707HP-R47MG-D	0.47	62.0	80.0	123.0	0.95	1.03
GMPC1707HP-1R0MG-D	1.00	52.0	60.0	70.0	1.6	2.0
GMPC1707HP-1R3MG-D	1.30	49.0	54.0	67.0	1.7	2.3
GMPC1707HP-1R5MG-D	1.50	47.0	52.0	65.0	2.0	2.5
GMPC1707HP-1R8MG-D	1.80	45.0	49.0	63.0	2.1	2.5
GMPC1707HP-2R2MG-D	2.20	43.5	47.0	62.0	2.4	2.7
GMPC1707HP-3R3MG-D	3.30	28.0	45.0	54.0	3.5	3.9
GMPC1707HP-4R7MG-D	4.70	25.0	41.0	50.0	4.8	5.5
GMPC1707HP-5R6MG-D	5.60	21.0	40.0	45.0	5.8	7.05
GMPC1707HP-6R8MG-D	6.80	19.0	32.0	39.0	8.4	9.2
GMPC1707HP-7R4MG-D	7.40	18.5	27.0	34.0	8.8	9.7
GMPC1707HP-8R2MG-D	8.20	18.0	25.0	31.0	9.6	10.8
GMPC1707HP-100MG-D	10.0	16.5	24.0	29.0	11.8	13.0
GMPC1707HP-150MG-D	15.0	12.5	23.0	27.0	17.8	20.5
GMPC1707HP-220MG-D	22.0	12.0	18.0	23.0	25.1	26.5
GMPC1707HP-330MG-D	33.0	10.7	15.0	20.0	38.0	44.0
GMPC1707HP-390MG-D	39.0	9.2	11.0	18.0	40.0	48.0
GMPC1707HP-470MG-D	47.0	8.7	9.5	16.0	48.0	55.0
GMPC1707HP-560MG-D	56.0	7.8	9.0	15.0	54.0	62.0
GMPC1707HP-680MG-D	68.0	7.0	8.0	13.0	68.0	80.0
GMPC1707HP-820MG-D	82.0	5.7	7.0	12.0	87.0	100.0
GMPC1707HP-101MG-D	100	5.3	6.5	12.0	102.0	118.0

Note:

1. Test frequency : L/Q: 100KHz /1.0V.
2. All test data referenced to 25℃ ambient.
3. Testing Instrument : L/Q: HP4284A,CH11025,CH3302,CH1320 ,CH1320S LCR METER / Rdc:CH16502,Agilent33420A MICRO OHMMETER.
4. Heat Rated Current (Irms) will cause the coil temperature rise approximately Δ t of 40℃.
5. Saturation Current (Isat1) will cause L0 to drop approximately 20%.
Saturation Current (Isat2) will cause L0 to drop approximately 30%.
6. The part temperature (ambient + temp rise) should not exceed 125℃under worst case operating conditions.Circuit design,component,PCB trace size and thickness,airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
7. Special inquiries besides the above common used types can be met on your requirement.



10. Typical Performance Curves

