




Wire Wound Type Common Mode Filter

GWCM9070-SERIES-M

1. Features

- Operating temperature -40~+125°C (Including self - temperature rise)

2. Dimension

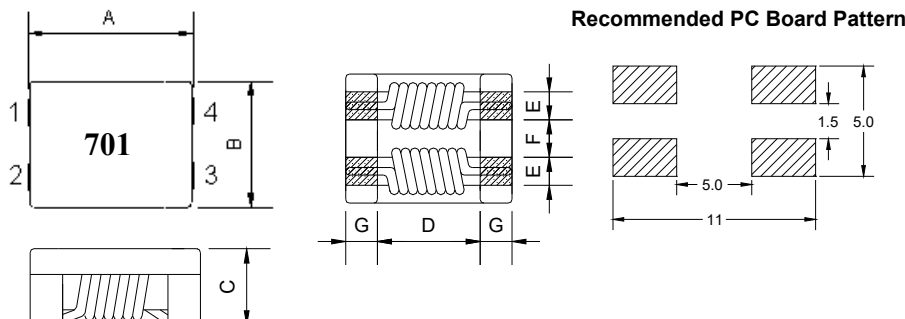

Series	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)
GWCM9070	9.0±0.5	7.0±0.5	4.8 max.	5.7 typ.	1.5±0.2	2.0±0.2	1.7±0.2

Unit:mm

2. Part Numbering

GWCM	9070	-	701	T	50	-	M
A	B	C	D	E			F

A: Series

B: Dimension

C: Impedance 701=700Ω

D: Packaging T = Taping

E: Rated Current 50=5A

F: Marking 印字:黑色 單向印字

3. Specification

Part Number	Impedance (Ω)		Test Frequency (MHz)	DC Resistance (Ω) max.(1 line)	Rated Current (A) max.	Rated Volt. (Vdc) max.	Insulation Resistance (MΩ) min.
	min.	typ.					
GWCM9070-301T60-M	225	300	100	6m	6.0	80	10
GWCM9070-501T60-M	450	600	100	8m	6.0	80	10
GWCM9070-701T50-M	500	700	100	10m	5.0	80	10
GWCM9070-102T40-M	750	1000	100	13m	4.0	80	10
GWCM9070-222T25-M	1700	2200	100	60m	2.5	80	10
GWCM9070-272T20-M	2000	2700	100	65m	2.0	80	10
GWCM9070-302T30-M	2500	3000	100	70m	3.0	80	10

4. Schematic Diagram

